

PrimeLink™ C9070 / C9065 Printer

Simply professional. Amazingly flexible.



Versatility that satisfies diverse needs, from professional to office work

Your teams require the flexibility and productive workflow of a multifunction device. Your graphics, creative and production teams want a higher level of quality and finishing. However, purchasing machines to satisfy each requirement may become costly and space consuming. PrimeLink C9070 / C9065 Printer can be your "all-in-one" solution that flexibly meets the demands of professionals while offering a multitude of functions for the efficiency and versatility of your office work environment.

OFFERING VERSATILITY WITH VARIOUS FEATURES

PrimeLink C9070 / C9065 Printer will assist your professional requirements with a variety of features that support creativity and innovation of your professional work. While offering functions such as density uniformity / alignment adjustments and colour calibration, its variety of finishing options and efficiency boosting workflows will keep jobs moving with less wasted time and materials. To cater your office work needs, this versatile printer also allows you to print, copy and scan - including automatic sending of scanned data to your PC or sending by e-mail or printing from USB. It can even print from virtually any smart phone or tablet. That's how the PrimeLink C9070 / C9065 Printer will boost any team's efficiency.

- EQUIPPED WITH FEATURES TO ACCELERATE YOUR NEW BUSINESS POTENTIAL WITH IN-HOUSE COLOUR PRINTING**
- Productive print speed – prints up to 70/65 ppm in colour and up to 75/70 ppm in black-and-white. And with easy set-up and automated workflows, you can handle quick turnarounds in style.
 - Media versatility – both coated and uncoated stocks up to 350 gsm. Supporting a variety of paper sizes including postcards and banners.
 - Wider finishing capabilities – A variety of inline finishing options offer a professional polish to presentation materials, brochures, reports and documents that need an extra appeal. Finishers include numerous functions like stapling, punching, folding, creasing, full bleed trimming and booklet making.
 - Workflow innovation – integration with FreeFlow Digital Workflow Collection and partner solutions that deliver workflow productivity, innovation and automation, as well as variable data solutions designed to meet customer demand for personalisation and business growth.

PrimeLink C9070 / C9065 Printer QUICK FACTS

- Speed**
Up to 70/65 ppm colour and 75/70 ppm black-and-white
- Single-pass scanner**
Up to 270 images per minute (ipm)
- Printing resolution**
2400 x 2400 dpi
- Toner**
Fuji Xerox Emulsion Aggregation (EA) Toner with ultra-low melt technology
- Media weights**
Up to 350 gsm and up to 300 gsm* for auto duplexing
- Media sizes**
Up to 330 x 660 mm

* For 257 to 300 gsm, print results are not fully assured.

Modify to "256"

Modify to "221 to 256"



For professionals Features that expands the creativity and efficiency of professional production

EXTRA EDGE IN SPEED AND IMAGE QUALITY

PrimeLink C9070 / C9065 Printer comes standard with a print server, which is ideal for professional and quick-print environments as well as corporate offices in which speed and ease-of-use are needed to boost productivity and efficiency.

SUPPORT FOR BANNER PRINTING

You can print on larger media with PrimeLink C9070 / C9065 Printer, which is capable of handling paper sizes up to 660 mm in length.

WIDE RANGE OF OPTIONS FOR A WIDER VARIETY OF FINISHED JOBS

As the number of incoming jobs grow from a handful to dozens or even hundreds a day and as they come in more shapes and sizes, you just cannot afford to have manual labour handling each job. PrimeLink C9070 / C9065 Printer offers a wider variety of finishing options to provide automation that keeps you productive whilst saving time and reducing costly errors.




For office work Latest office supporting technologies to accelerate your business activities

Portable UI for Business™

Your smartphone (iOS and Android™) can be used as a portable UI panel. Simply set a job on your smartphone and touch the NFC (near field communication) reader*2 of the multifunction device to perform basic operations such as copy and scan (Store to Folder or E-mail). Portable UI for Business enables up to 30 frequently used sets of settings to be registered as favorites. These settings can be recalled with a single touch. The destination for saving scanned data can also be registered for added convenience.

*1: A wireless environment with an access point is required.
*2: IC Card Reader is required.



multifunction device to automatically launch Print Utility and you are ready to print or scan.

Wi-Fi Direct®

Even when the internal intranet environment cannot be used by the mobile device of a visitor or the personal mobile device of an employee, these devices can connect to the multifunction device via a wireless kit* to output documents. In addition to printing and scanning with PrintUtility, AirPrint, Google Cloud Print™, and Mopria are also supported.

* Optional.



Server-less on-demand printing*

If the multifunction device that you set as the output destination is being used, you can redirect your print job to another multifunction device – saving you time, especially when you are in a hurry. Check the status of your print job on the UI panel before printing using the preview displays, or change settings such as the number of copies, colour mode and one-sided/two-sided output, all from the UI panel. This improves document security and reduces waste from unnecessary printing.

* Optional.

Print Utility

Simple scanning for workflows*

Convert scanned documents automatically to a pre-specified file format and destination. Once a file format and destination is registered, select the workflow button and scan the document. Add a file name by adding a document type and date to a user-defined string set on a PC, great for routine work. Efficiency in managing and utilising contracts and bills, etc. is dramatically increased.

* Optional.



Offering a myriad of standard functions to support your creativity and work efficiency.

INNOVATION COMES STANDARD

Vibrant colour and incredible detail

With our 2400 x 2400 dpi printing resolution, images are rich with crisp text so your output will always impress.

Excellent image quality

Our EA Low Melt Toner technology is chemically grown, so the small, consistent particles produce impeccable quality with smooth transitions and an offset-like finish.


CLEAR PRINTING OF SMALL TEXT AND THIN LINES

Edge enhancement

Jaggedness, which tends to occur with mid-tone texts and lines, is suppressed by screen processing on contours, reproducing crisp text and lines.

Adjust Invert Text/Line Weight

PrimeLink C9070 / C9065 Printer mitigates crushing of white texts and fattening of black texts when the texts are small. Several levels of toner amount are available for selection for applying to the contour, so that you can set a desirable balance for improved text readability.

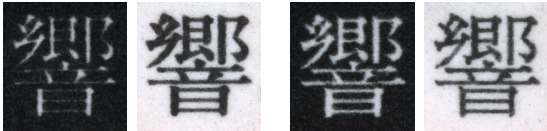

Adjust Invert Text/Line Weight: Off Adjust Invert Text/Line Weight: On

SELECTING DIFFERENT SCREENS FOR INDIVIDUAL OBJECTS FOR OPTIMUM IMAGE QUALITY

Various screens can be chosen according to the objects your use, such as texts and photos.

TRUE Adobe® PostScript® 3™ CERTIFICATION AND THE LATEST Adobe® PDF Print Engine*

These features plus blazing speeds means your creativity is never restricted.

* Adobe PDF Print Engine is Optional.




CONTROL QUALITY AND SAVE TIME WITH ADVANCED SIQA*

Advanced SIQA can save you from the hassle of adjusting alignment, density uniformity, tonal reproduction curve or transfer voltage. By simply scanning the printed charts, advanced SIQA will optimise the adjustment values. With advanced SIQA, operators no longer have to go through the time-consuming and iterative procedure of having to print, measure and manually adjust individual settings. PrimeLink C9070 / C9065 Printer reduces waste and a considerable amount of operator intervention while consistently meeting image quality expectations.


* Simple Image Quality Adjustment.

Lineup of optional feeders and finishers to widely accommodate customer needs.


FEEDING OPTIONS



HCF B1
Adds 2000 sheets of A4 (up to 220 gsm).



High Capacity Feeder B1-S
Adds 2000 sheets in sizes of up to 330 x 488 mm (up to 350 gsm).
Storage cabinet included.



High Capacity Feeder C1-DS
Adds 4000 sheets in sizes of up to 330 x 488 mm (up to 350 gsm).


[Air Assist](#) [Multifeed Detection](#)

[Air Assist](#) [Multifeed Detection](#)

[Air Assist](#) [Multifeed Detection](#)


Note : Long paper is fed from the Bypass Tray (standard). When High Capacity Feeder B1-S or High Capacity Feeder C1-DS is connected, Bypass Tray is detached from the printer and attached to the connected High Capacity Feeder.

FINISHING OPTIONS




C3 Finisher, or C3 Finisher with Booklet Maker¹

[Sort/Stack](#) [Staple](#) [Punch⁵](#)
[Saddle Staple/Single Fold⁶](#) [Z-Fold/Tri-Fold⁶](#)




Inserter D1²

[Cover/Sheet Insertion](#)




Crease/Two-sided Trimmer D2²

[Two-Sided Trim](#)
[Crease](#)



Finisher D6, Finisher D6 with Booklet Maker, or Finisher D6 Plus³

[Sort/Stack](#) [Staple](#) [Punch⁵](#)
[Saddle Staple/Single Fold⁶](#) [Z-Fold/Tri-Fold⁶](#)



SquareFold Trimmer D1⁴


[Face Trim](#)
[Square Fold](#)

Note: Offset Catch Tray and Simple Catch Tray are provided for cases that do not require finishing.
For third party vendor finishers, please contact your local Fuji Xerox representative.
¹: Transport Unit V1 is required.
²: Finisher D6, Finisher D6 with Booklet Maker or Finisher D6 Plus is required.
³: Interface Decurler Module D1 is required.
⁴: Finisher D6 with Booklet Maker is required.
⁵: Optional.
⁶: For C3 Finisher with Booklet Maker or Finisher D6 with Booklet Maker.


GX-i Print Server for the PrimeLink C9070 / C9065 Printer

Superb speed and image quality


Featuring a simple user interface, versatile media handling and automated RGB colour correction, this GX-i Print Server employs the developed architecture by Fuji Xerox to reduce RIP load and a RIP Accelerator Board to maintain image quality through high-speed, lossless compression.

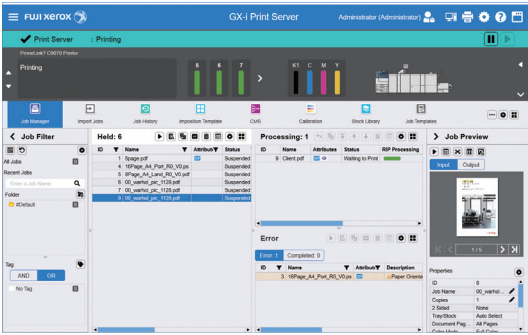


FINISHING APPLICATIONS




Cover/Sheet Insertion




Punch




Staple




Saddle Staple




Booklet




Z-Fold




Tri-Fold




Crease




Face Trim



Two-Sided Trim




Full Bleed Trim



Square Fold

Note: Full bleed trim is made by two-sided trim and face trim.

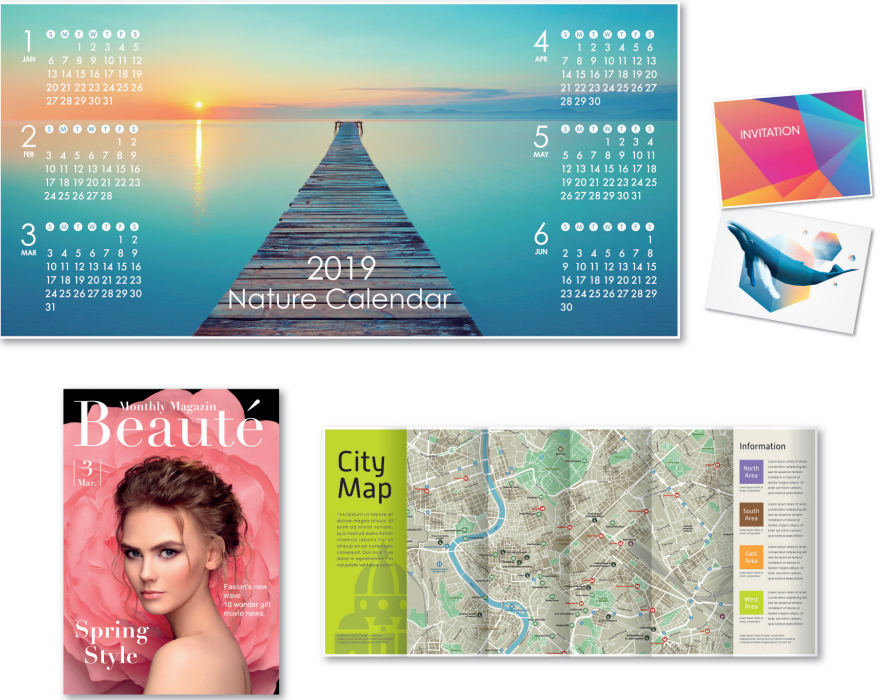

PrimeLink C9070 / C9065 Printer Functions & Specifications

Basic Specifications / Print Function

Item		Description	
		PrimeLink C9070 Printer	PrimeLink C9065 Printer
Colour Capability		Full Colour	
Printing Resolution		2400 x 2400 dpi	
Continuous Print Speed ¹	A4	B/W: 75 ppm Colour: 70 ppm	B/W: 70 ppm Colour: 65 ppm
	A3	B/W: 37 ppm Colour: 35 ppm	B/W: 35 ppm Colour: 33 ppm
Paper Size ²	Tray 1	Standard Size: Max A3, Min A5 Custom Size: 140 x 182 mm to 330 x 458 mm	
	Tray 2	Standard Size: Max A3, Min A5 Custom Size: 140 x 182 mm to 297 x 432 mm	
	Tray 3, 4	Standard Size: A4, JIS B5	
	Bypass Tray	Standard Size: Max A3, Min A6 Custom Size: 140 x 182 mm to 330 x 660 mm	
Paper Weight	Tray 1, 2, 3, 4	60 to 256 gsm	
	Bypass Tray	60 to 350 gsm ³	
Paper Tray Capacity ³	Standard	500 sheets x 2-tray + 870 sheets + 1140 sheets + Bypass Tray 250 sheets	
	Optional	HCF B1: 2000 sheets x 1-tray High Capacity Feeder B1-S: 2000 sheets x 1-tray High Capacity Feeder C1-DS: 2000 sheets x 2-tray	
	Max	7260 sheets [Standard + High Capacity Feeder C1-DS]	
Output Tray Capacity ^{4,5}		500 sheets (A3)	
Power Supply		AC220-240 V +/- 10 %, 10 A, 50/60 Hz common	
Maximum Power Consumption ⁶		2.4 kW	
Dimensions ⁷		W 1022 x D 804 x H 1392 mm	
Weight ⁸		232 kg	

*1: When continuously printing a single document, 60 to 128 gsm, uncoated paper. Print speed may be reduced depending on conditions of output data, on whether auto image quality adjustment is performed, on whether the job includes a mixture of paper sizes and types, and other reasons.
*2: Image loss width: Lead edge 4.0 mm, Trail edge 4.0 mm, Front 3.5 mm, Rear 3.5 mm.
*3: Banner Printing 60 to 220 gsm. *4: 80 gsm paper. *5: Offset Catch Tray. *6: Main unit with Offset Catch Tray.
*7: Includes main unit and Large Size UI panel. Excludes output tray and print server. With the Bypass Tray closed.
*8: Includes main unit, photoreceptor, and Large Size UI panel. Excludes output tray, print server, paper, and toner.

Scan Function

Item	Description
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed	Same as the "Scan Speed" for the Duplex Automatic Document Feeder
Scanning Method	Store to folder (TWAIN Interface support), Scan to PC (FTP, SMB), Scan to e-mail

Copy Function

Item		Description
Scan Resolution		600 x 600 dpi
Printing Resolution		2400 x 2400 dpi (High Resolution Photo) 600 x 600 dpi (Text / Text-Photo / Photo / Map)
First Copy Output Time	B/W	4.1 seconds or less (A4 / Monochrome priority mode)
	Colour	6.5 seconds or less (A4 / Colour priority mode)

Print Server [GX-i Print Server for the PrimeLink C9070 / C9065 Printer]

Item	Description
Type	Main unit built-in type
CPU	Intel® Core™ i3-7101E Processor (3.9 GHz)
Storage device	Hard disk: 1 TB
Memory capacity	16 GB (Max: 16 GB)
Server Operation System	Windows 10 IoT Enterprise (64bit)
Page Description Language	Adobe® PostScript® 3™, PDF/VT-1, PDF/VT-2, PPM, VIPP ¹
Print Data Format	PS, PDF1.7, PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, EPS, TIFF, JPEG
Supported Operating System	Windows 10 (32bit), Windows 10 (64bit), Windows 8.1 (32bit) Windows 8.1 (64bit), Windows 7 (32bit) [Service Pack 1] Windows 7 (64bit) [Service Pack 1], Windows Server 2016 (64bit) Windows Server 2012 R2 (64bit), Windows Server 2012 (64bit) Windows Server 2008 R2 (64bit) [Service Pack 1] Windows Server 2008 (32bit) [Service Pack 2] Windows Server 2008 (64bit) [Service Pack 2] macOS 10.14 Mojave, macOS 10.13 High Sierra macOS 10.12 Sierra, OS X 10.11 El Capitan, OS X 10.10 Yosemite
Interface	Ethernet: 1000BASE-T / 100BASE-TX / 10BASE-T x 2 USB: USB3.0 x 4, USB2.0 x 2
Network Protocol	TCP/IP (Ipd/FTP/IPP ² /SMB/JDF/HTTP), AppleTalk ³ , Bonjour
Power Supply	AC100-240 V +/- 10 %, 2.5 A (100 V) / 1.1 A (240 V), 50/60 Hz common
Maximum Power Consumption	0.2 kW
Dimensions	W 290 x D 135 x H 318 mm
Weight	6.5 kg

Model: A-SV10
*1: Used with optional software FreeFlow V1 Compose. *2: Used to work with FreeFlow Digital Workflow Collection.
*3: AppleTalk is not supported by Mac OS X 10.6 Snow Leopard or later.

Duplex Automatic Document Feeder C1-PC

Item		Description
Original Size / Paper Weight		Max A3, Min A6 ⁻¹ 38 to 200 gsm (In Duplex: 50 to 200 gsm)
Capacity ²		250 sheets
Scan Speed ³	Copy	B/W: 80 sheets/minute Colour: 75 sheets/minute
	Scan	B/W: 135 sheets/minute, Colour: 135 sheets/minute (1 pass, 2 sided scanning: B/W: 270 ppm, Colour: 270 ppm) [Fuji Xerox Standard Paper (A4), 200 dpi, to Folder.]

*1: The minimum custom size is 84 x 140 mm. *2: 64 gsm paper.
*3: The scanning speed varies depending on the documents.

HCF B1 (Optional)

Item	Description
Paper Size	Standard Size: Max A4, Min JIS B5
Paper Weight	60 to 220 gsm
Feeding Capacity / Number of Tray	2000 sheets x 1 -tray
Dimensions	W 389 x D 610 x H 377 mm
Weight	29 kg

*1: 80 gsm paper.

High Capacity Feeder B1-S (Optional)

Item	Description
Paper Size	Standard Size: Max A3, Min A6 Custom Size: 100 x 148 mm to 330 x 660 mm ²
Paper Weight	60 to 350 gsm ³
Feeding Capacity / Number of Tray	2000 sheets x 1 -tray
Power Supply	AC100-120 V +/- 10 %, 2.5 A / AC220-240 V +/- 10 %, 1.5 A, 50/60 Hz common
Maximum Power Consumption	360 W
Dimensions	W 988 x D 762 x H 992 mm
Weight ⁵	160 kg

Note: When High Capacity Feeder B1-S is connected, Bypass Tray is detached from the printer and attached to this option.
*1: If paper with a lead edge length between 100 mm and 182 mm is used, Post Card Kit is required.
*2: When Bypass Tray is connected. When Bypass Tray is not connected, Max 330 to 488 mm.
*3: Banner Printing 60 to 220 gsm.
*4: 80 gsm paper.
*5: Excludes the Bypass Tray and the Large Size UI panel.

High Capacity Feeder C1-DS (Optional)

Item	Description
Paper Size ¹	Standard Size: Max A3, Min A6 Custom Size: 100 x 148 mm to 330 x 660 mm ²
Paper Weight	60 to 350 gsm ³
Feeding Capacity / Number of Tray ⁴	2000 sheets x 2 -tray
Power Supply	AC100-120 V +/- 10 %, 5 A / AC220-240 V +/- 10 %, 3 A, 50/60 Hz common
Maximum Power Consumption	720 W
Dimensions	W 988 x D 762 x H 992 mm
Weight ⁵	190 kg

Note: When High Capacity Feeder C1-DS is connected, Bypass Tray is detached from the printer and attached to this option.
*1: If paper with a lead edge length between 100 mm and 182 mm is used, Post Card Kit is required.
*2: When Bypass Tray is connected. When Bypass Tray is not connected, Max 330 to 488 mm.
*3: Banner Printing 60 to 220 gsm.
*4: 80 gsm paper.
*5: Excludes the Bypass Tray and the Large Size UI panel.

Simple Catch Tray / Offset Catch Tray (Optional)

Item	Description	
	Simple Catch Tray	Offset Catch Tray
	Standard Size: Max A3, Min A6 Custom Size: 100 x 148 mm to 330 x 660 mm	
	60 to 350 gsm ¹	
	500 sheets	

*1: Banner Printing 60 to 220 gsm.
*2: 64 gsm paper.

Interface Decurler Module D1 (Optional)

Item	Description
Power Supply	AC100-240 V +/- 10 %, 1.3 A (100 V) / 0.5 A (240 V), 50/60 Hz common When Inserter D1 is installed: AC100-240 V +/- 10 %, 2 A (100 V) / 0.9 A (240 V), 50/60 Hz common
Maximum Power Consumption	250 W
Dimensions	W 340 x D 725 x H 992 mm
Weight	40 kg

Note: Interface Decurler Module D1 is necessary for connecting the Finisher D6, Finisher D6 Plus or Finisher D6 with Booklet Maker to the printer.

Inserter D1 (Optional)

Item	Description
Paper Size	Standard Size: Max A3, Min A5 Custom Size: 182 x 148 mm to 330 x 488 mm
Paper Weight	60 to 350 gsm
Paper Capacity ¹	250 sheets
Power Supply	Supplied from the Interface Decurler Module D1
Dimensions ²	W 700 x D 725 x H 1235 mm
Weight	45 kg

Note: Finisher D6, Finisher D6 Plus or Finisher D6 with Booklet Maker is required.
Cannot print on the paper loaded in Inserter D1.
*1: 82 gsm paper.
*2: The width of the paper transfer area when connected to the device is 165 mm.

C3 Finisher / C3 Finisher with Booklet Maker (Optional)

Item		Description	
		C3 Finisher	C3 Finisher with Booklet Maker
Type	Output Tray	Sort / Stack	
	Finishing Tray	Sort (Offset available) / Stack (Offset available)	
	Booklet Tray	-	Sort / Stack
Paper Size	Output Tray	Standard Size : Max A3, Min A6 Custom Size: 100 x 148 mm to 330 x 660 mm	
	Finishing Tray	Standard Size : Max A3, Min JIS B5 Custom Size: 203 x 182 mm to 330 x 488 mm	
Paper Weight	Output Tray	60 to 350 gsm ¹	
	Finishing Tray	60 to 350 gsm	
Paper Capacity ²	Output Tray	500 sheets (A4)	
	Finishing Tray	[Without Stapling] A4: 3000 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking ³ : 300 sheets [With Stapling] A4: 200 sets (Single stapling), 100 sets (Dual stapling) or 3000 sheets JIS B4 or larger: 100 sets or 1500 sheets Mixed Size Stacking ³ : 70 sets or 200 sheets	[Without Stapling] A4: 1500 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking ³ : 300 sheets [With Stapling] A4: 200 sets (Single stapling), 100 sets (Dual stapling) or 1500 sheets JIS B4 or larger: 100 sets or 1500 sheets Mixed Size Stacking ³ : 70 sets or 200 sheets
		Booklet Tray	-
		Capacity	50 sheets (90 gsm or less)
		Paper Size	Standard Size : Max A3, Min JIS B5 Custom Size : 203 x 182 mm to 297 x 432 mm
Staple	Paper Weight	60 to 220 gsm	
	Position	Single stapling, Dual stapling	
Punch ^{4,5}	Number of Holes ⁶	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)	
	Paper Size	Max A3 Min JIS B5 (2-hole punch, 3-hole punch), A4 (4-hole punch)	
	Paper Weight	60 to 200 gsm	
Booklet Finishing	Capacity ⁷	-	Saddle Staple: 16 sheets Single Fold: 5 sheets
	Paper Size	-	Standard Size: Max A3, Min JIS B5 Custom Size: 210 x 279 mm to 330 x 457 mm
	Paper Weight	-	60 to 220 gsm
Dimensions		W 834 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 1075 x D 726 x H 1056 mm	W 894 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 1135 x D 726 x H 1056 mm
		Weight	48 kg When Folder Unit CD1 is installed: 100 kg

Note: Transport Unit V1 is required.
*1: Banner Printing 60 to 220 gsm. *2: 80 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets.
*4: For 16 sheets/set booklet. Paper may not be accepted depending on paper type and other usage conditions.
*5: Optional. *6: The possible number of holes depends on the paper size.
*7: The capacity can decrease depending on type and weight of paper being used and other conditions.

Folder Unit

Item		Description	
		Folder Unit CD1	Folder Unit CD2
Z Fold Half Sheet	Paper Size	A3, JIS B4	
	Paper Weight	60 to 90 gsm	
Tri-fold	Paper Size	A4	
	Paper Weight	60 to 90 gsm	
	Paper Capacity ¹	30 sheets	
Power Supply		AC100-127 V +/- 10 %, 1 A / AC200-240 V +/- 10 %, 0.6 A, 50/60 Hz common	
Maximum Power Consumption		100 W	
Dimensions		W 235 x D 726 x H 992 mm	
Weight		53 kg	55 kg

Note: Folder Unit CD1 is option for C3 Finisher and C3 Finisher with Booklet Maker.
Folder Unit CD2 is option for Finisher D6, Finisher D6 Plus and Finisher D6 with Booklet Maker.
*1: 82 gsm paper.

Crease/Two-sided Trimmer D2 (Optional)

Item		Description
Two-sided Trim	Paper Size	Standard Size: Max A3, Min A4 Custom Size: 194 x 210 mm to 330 x 488 mm
	Paper Weight	60 to 350 gsm
	Trim dimensions	One side 6 to 25 mm
Crease	Paper Size	Standard Size: Max A3, Min JIS B5 Custom Size: 182 x 210 mm to 330 x 488 mm
	Paper Weight	60 to 350 gsm ⁻¹
	Number of lines	1 to 5
Power Supply		AC100-240 V +/- 10 %, 4 A (100 V) / 2 A (240 V), 50/60 Hz common
Maximum Power Consumption		480 W
Dimensions		W 605 x D 725 x H 992 mm
Weight		128 kg

Note: Finisher D6, Finisher D6 Plus or Finisher D6 with Booklet Maker is required.
*1: Up to 300 gsm is supported for booklet finishing. 157 gsm or more is supported for single sheet.

Finisher D6 / Finisher D6 Plus / Finisher D6 with Booklet Maker (Optional)

Item		Description			
		Finisher D6	Finisher D6 Plus	Finisher D6 with Booklet Maker	
Type	Output Tray	Sort / Stack			
	Finishing Tray	Sort (Offset available) / Stack (Offset available)			
	Booklet Tray	-	-	Sort / Stack	
Paper Size	Output Tray	Standard Size: Max A3, Min A6 Custom Size: 100 x 148 mm to 330 x 660 mm			
	Finishing Tray	Standard Size: Max A3, Min A5 Custom Size: 148 x 148 mm to 330 x 488 mm			
Paper Weight	Output Tray	60 to 350 gsm ¹			
	Finishing Tray	60 to 350 gsm			
Paper Capacity ²	Output Tray	500 sheets (A4)			
	Finishing Tray	[Without Stapling] A4: 3000 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking ³ : 350 sheets [With Stapling] A4: 200 sets or 3000 sheets JIS B4 or larger: 100 sets or 1500 sheets	[Without Stapling] A4: 2000 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking ³ : 350 sheets [With Stapling] A4: 200 sets or 2000 sheets JIS B4 or larger: 100 sets or 1500 sheets		
		Booklet Tray	-	-	20 sets ⁴
		Capacity	100 sheets ⁵ (90 gsm or less)		
		Paper Size	Standard Size: Max A3, Min A5 Custom Size: 182 x 148 mm to 297 x 432 mm		
Staple	Paper Weight	60 to 350 gsm			
	Position	Single stapling ⁶ , Dual stapling			
Punch ⁷	Number of Holes ⁸	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)			
	Paper Size	Standard Size: Max A3, Min JIS B5 (2-hole punch, 3-hole punch), A4 (4-hole punch) Custom Size: 203 x 182 mm to 297 x 431 mm			
		Paper Weight	60 to 220 gsm		
	Booklet Finishing	Capacity ⁹	-	-	Saddle Staple: 30 sheets Single Fold: 5 sheets
Paper Size		-	-	Standard Size: Max A3, Min JIS B5 Custom Size: 182 x 257 mm to 330 x 488 mm	
Paper Weight		-	-	60 to 300 gsm	
Power Supply		AC100-127 V +/- 10 %, 3 A / AC200-240 V +/- 10 %, 1.8 A, 50/60 Hz common			
Maximum Power Consumption		300 W			
Dimensions		W 855 x D 725 x H 1200 mm When Folder Unit CD2 is installed: W 1092 x D 726 x H 1200 mm		W 892 x D 725 x H 1200 mm When Folder Unit CD2 is installed: W 1134 x D 726 x H 1200 mm	
Weight		85 kg When Folder Unit CD2 is installed: 140 kg	90 kg When Folder Unit CD2 is installed: 145 kg	105 kg When Folder Unit CD2 is installed: 160 kg	

Note: Interface Decurler Module D1 is required.
*1: Banner Printing 60 to 220 gsm. *2: 82 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets.
*4: When over 17 sheets/set, the booklet tray capacity is 16 sets. *5: 65 sheets for sizes exceeding A4.
*6: One place rear angled stapling is supported on A4 and A3 only. *7: Optional.
*8: The possible number of holes depends on the paper size.
*9: The capacity can decrease depending on type and weight of paper being used and other conditions.

SquareFold Trimmer D1 (Optional)

Item		Description
Paper Size		Same as the paper size of the Finisher D6 Booklet Finishing.
Paper Weight		Same as the paper weight of the Finisher D6 Booklet Finishing.
Booklet Tray Capacity ^{*1}		20 sets (15 sheets bind and below), 15 sets (16 sheets bind and above)
Face Trim	Capacity ^{*2}	Saddle Staple: 30 sheets, Single Fold: 5 sheets
	Trim dimensions	2 to 20 mm
Square Fold Capacity ^{*2, *3}		30 sheets
Power Supply		AC100-240 V +/- 10 %, 0.8 A (100 V) / 0.4 A (240 V), 50/60 Hz common
Maximum Power Consumption		96 W
Dimensions		W 1066 x D 725 x H 552 mm
Weight		100 kg

Note: Finisher D6 with Booklet Maker is required.
*1: Paper may not be accepted depending on paper type and other usage conditions.
*2: The capacity can decrease depending on type and weight of paper

Remote Services*

Fuji Xerox Remote Services increase machine reliability, uptime, and productivity — making it easier for us to help you make your business stronger. Our Remote Services seamlessly integrate support systems and tools with highly skilled support teams across the globe. These connections enable us to provide proactive and relevant problem resolutions through robust underlying knowledge and comprehensive product understanding.



Customer Site



Internet (SSL / TLS)



Fuji Xerox

- Transmit machine data to provide preventive maintenance, predict machine failure, and reduce the time to fix problems.
- Monitor supplies and consumable levels (such as toner) and automatically deliver them, saving time and ensuring you have what you need to keep printing, when you need it.
- Automatically report billing meters saving time and improving accuracy.

* Availability depends on location.

Notes

- 1) To comply with paper weight specifications, it is recommended to use Fuji Xerox recommended paper. Document may not be printed correctly depending on usage conditions.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Asia Pacific Pte Ltd

80 Anson Road #37-00 Fuji Xerox Towers Singapore 079907

Tel. +65-6766-8888

<https://www.fujixerox.com/>

